

**BILL OF MATERIALS FOR CRATE
AND EXIT GATE ONLY.**


LUMBER QUANTITY	SIZE	USE
1	2" x 4" x 10' - 0"	BASE
1	2" x 4" x 8' - 0"	BASE
1	2" x 4" x 12' - 0"	POST
2	2" x 4" x 10' - 0"	POST
1	2" x 4" x 6' - 0"	TIES
1	1" x 12" x 16' - 0"	SIDES & GATE
2	1" x 12" x 10' - 0"	FLOOR
1	1" x 6" x 10' - 0"	FLOOR
2	1" x 4" x 14' - 0"	SLATS (VERT.)
1	1" x 4" x 12' - 0"	SLATS (HORIZ.)
1	1" x 4" x 14' - 0"	GATE BATTENS
2	1" x 2" x 10' - 0"	CLEATS
2	2" x 6" x 10' - 0"	(FOOTBOARDS)
MISCELLANEOUS		
24	3/8" x 3/2"	BOLTS, NUTS & ETC.
48	3/8" x 1/2"	BOLTS, NUTS & ETC.
6	ANGLES 1/4" x 3/2" - 1/2" LEGS.	
6	ANGLES 1/4" x 3/2" - 1/2" BENT ENDS	
4	PAIR 8" T HINGES	
1	HASP AND STAPLE	
1	LBS. 6d COMMON NAILS	

USE OF BREEDING CRATE

SUPPORT BOAR ON TWO 2"x6" FOOTBOARDS WITH FRONT ENDS RESTING ON CLEATED GATE AND REAR ENDS ON CLEATED FLOOR, ADJUST HEIGHT TO SUIT; THEN INSERT A 2"x4" BAR THRU SLATS AND UNDER 2"x6" FOOTBOARDS.

CAUTION SHOULD BE USED TO PREVENT CRACKING ANIMALS JAW WITH HEADGATE.

EXIT GATE OR HEADGATE AS DESIRED.

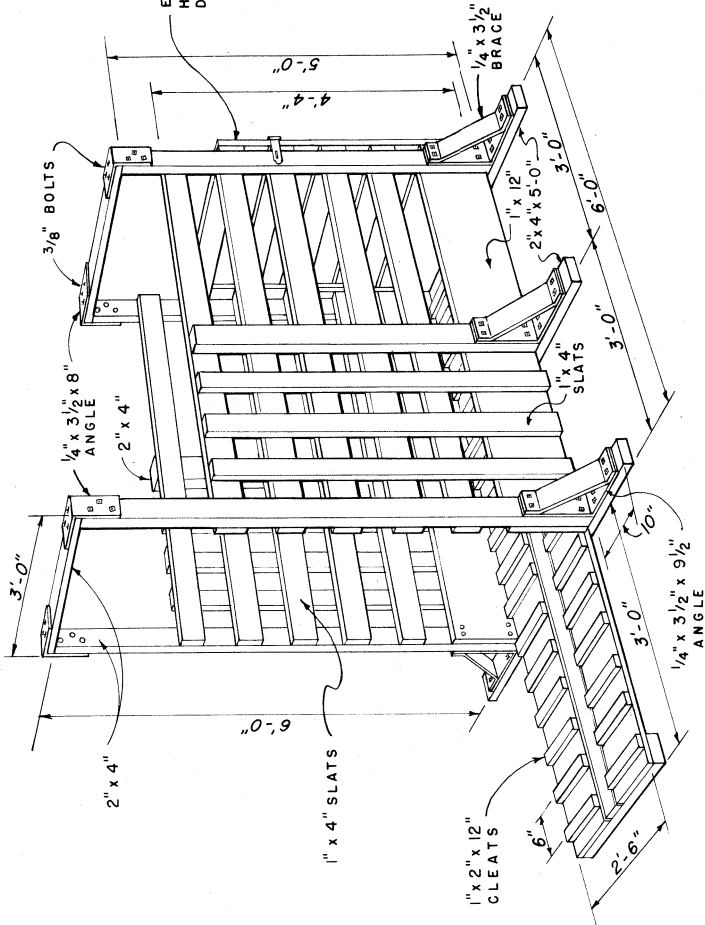

PERSPECTIVE

NOTE:

- USE CARRIAGE BOLTS WHEREVER PRACTICABLE. ROUNDED HEAD SIDE TOWARDS ANIMAL TO PREVENT INJURY.
- ALL LUMBER IN CONTACT WITH EARTH SHOULD BE PRESSURE TREATED WITH CREOSOTE OR SIMILAR PRESERVATIVE. ALL OTHER LUMBER TO BE PAINTED WITH WOOD PRESERVATIVE.
- ALL METAL TO BE GALVANIZED OR PAINTED WITH A METAL PRESERVATIVE.

